


RJ-IW/1

Features

- 360° High Pressure Spray Nozzles
- Variable Pressure and Flow Rate
- Variable Cycle Time
- Freshwater Rinsing Station
- Filtration and Recirculation Available

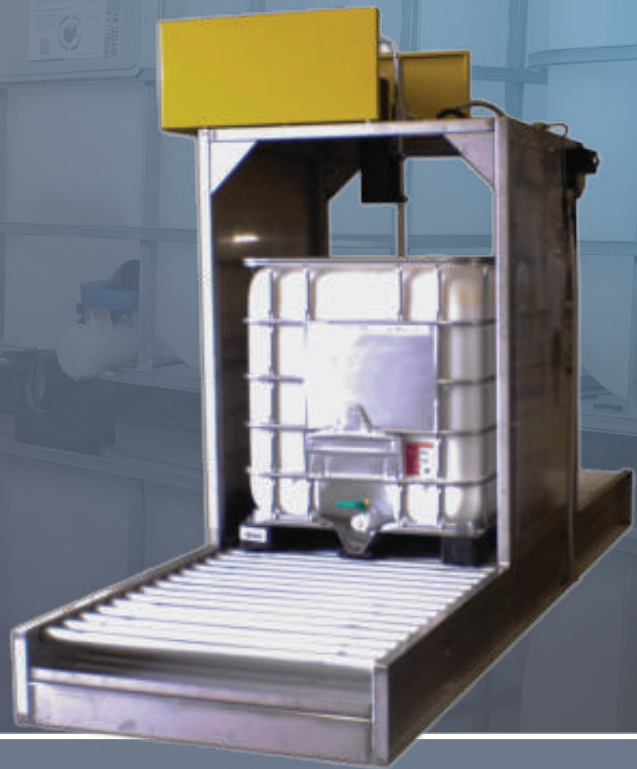

The RJ-IW/1 is a high pressure internal rinsing station that strips contaminants from the inside of the IBC.

Once the IBC has been loaded into the rinse chamber the specially designed IBC nozzle is lowered into the IBC. The pressure and flowrate can be fully controlled allowing the machine to be adapted to suit a wide range of industrial applications. Rinsing an IBC is typically completed in around three minutes.

The machines can either use heated or ambient water to rinse the IBC or Tote.

Usually, the ambient solution is used for water-based residues, and heated caustic liquor for non-water based residues.

To reduce operating costs, as an optional extra, it is possible to add a 500L recirculating tank, allowing the wash solution to be filtered and reused.



Throughput	20p/hr
Height (mm)	2560
Width (mm)	1453
Length (mm)	1540
Min Air Pressure	5.5 BAR
Pump Power	5.6kW/7.5HP
Pump Pressure	200 BAR/3000 PSI
Electric	3 Phase, 415v, 50Hz
Flow Rate	15L/min
Motor Type	Hollow Shaft
Inlet/Outlet	1/2" Male, 3/8" Male

