


RJ-IW/1C

Features

- 360° High Pressure Spray Nozzles
- Variable Pressure and Flow Rate
- Variable Cycle Time
- Chemical Dosing
- Filtration and Recirculation Available

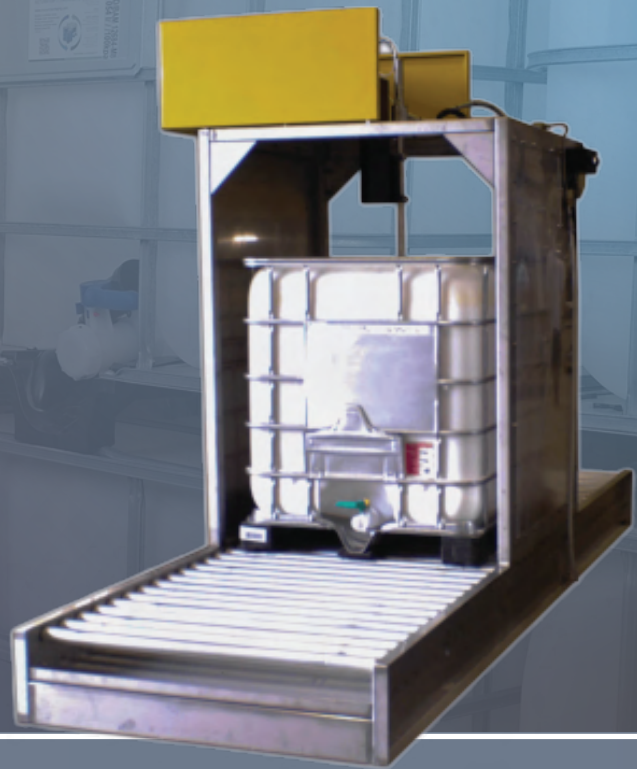


The RJ-IW/1C is a high pressure internal washing station that strips contaminants from the inside of the IBC.

Once the IBC has been loaded into the rinse chamber the specially designed IBC nozzle is lowered into the IBC. The pressure and flowrate can be fully controlled allowing the machine to be adapted to suit a wide range of industrial applications. Rinsing an IBC is typically completed in around five minutes.

The machines use either heated or ambient wash liquor to clean the IBC or Tote.

Usually, the ambient solution is used for water-based residues, and heated caustic liquor for non-water based residues.

To reduce operating costs, as an optional extra, it is possible to add a 500L recirculating tank, allowing the wash solution to be filtered and reused.

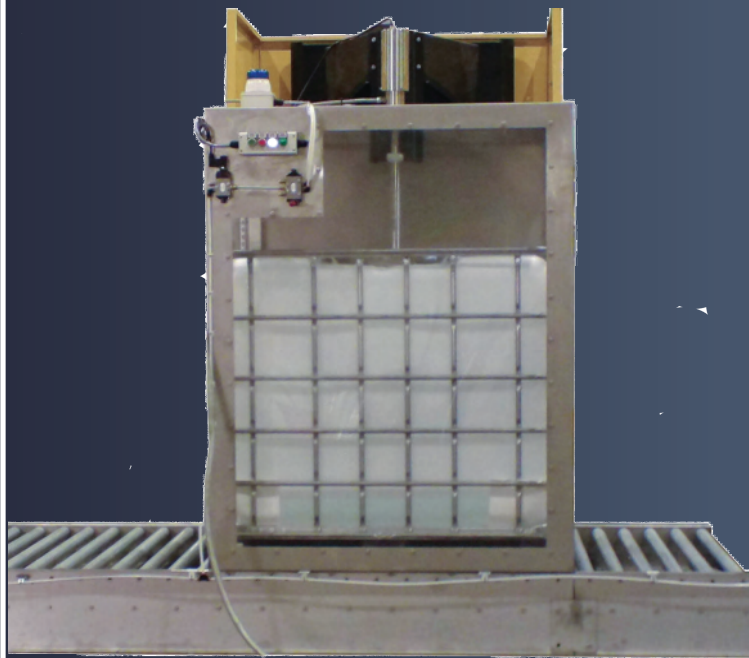

Throughput	12 p/hr
Height (mm)	2560
Width (mm)	1453
Length (mm)	1540
Min Air Pressure	5.5 BAR
Pump Power	5.6kW/7.5HP
Pump Pressure	200 BAR/3000 PSI
Electric	3 Phase, 415v, 50Hz
Flow Rate	15L/min
Motor Type	Hollow Shaft
Inlet/Outlet	1/2" Male, 3/8" Male

