


RJ-IW/2

Features

- 360° High Pressure Spray Nozzles
- Variable Pressure and Flow Rate
- Variable Cycle Time
- Automatic Two-Stage Washer
- Filtration and Recirculation Available

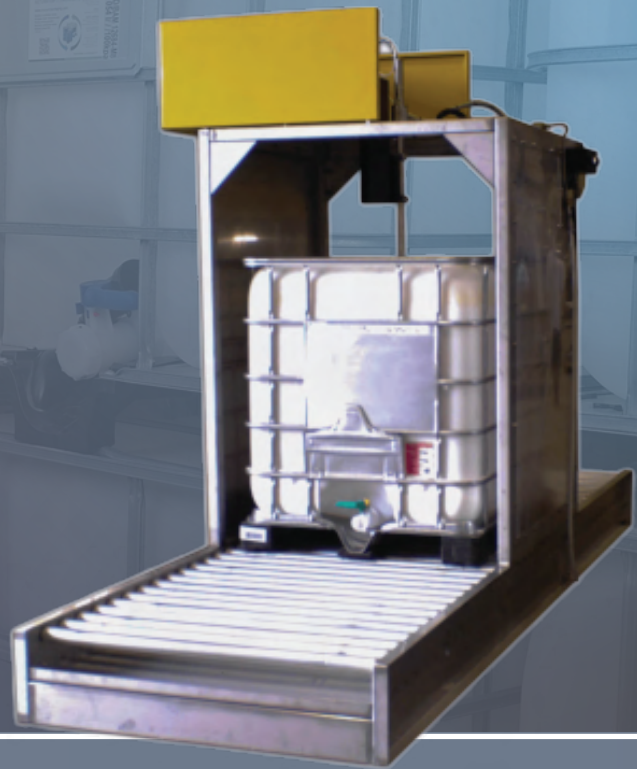

The RJ-IW/2 is an ideal choice for washing IBCs in a small footprint. Capable of washing IBCs within an 8 minute cycle time, this two-stage washer uses both chemical dosing and the impingement from the high-pressure spray nozzles to remove contamination from the container.




Once the IBC has been loaded into the wash chamber, the specially designed IBC nozzle is lowered into the IBC. The machine is automatically taken through an initial chemical wash to remove the bulk of the contamination before being rinsed with freshwater. Cycle times, pressure and flowrate can be optimised for the desired application.

To reduce operating costs, as an optional extra, it is possible to add a 500L recirculating tank, allowing the wash solution to be filtered and reused.





Throughput	7.5 p/hr
Height (mm)	2560
Width (mm)	1453
Length (mm)	1540
Min Air Pressure	5.5 BAR
Pump Power	5.6kW/7.5HP
Pump Pressure	200 BAR/3000 PSI
Electric	3 Phase, 415v, 50Hz
Flow Rate	15L/min
Motor Type	Hollow Shaft
Inlet/Outlet	1/2" Male, 3/8" Male

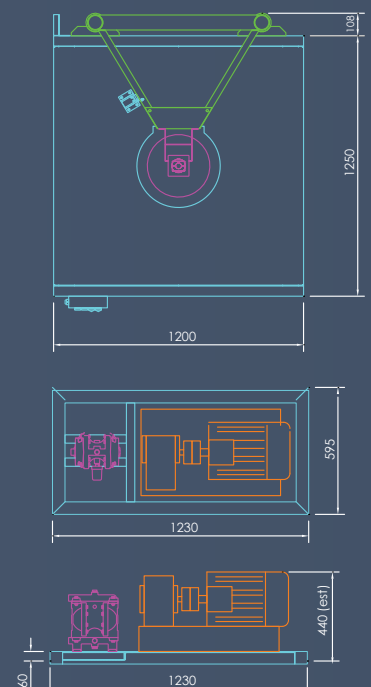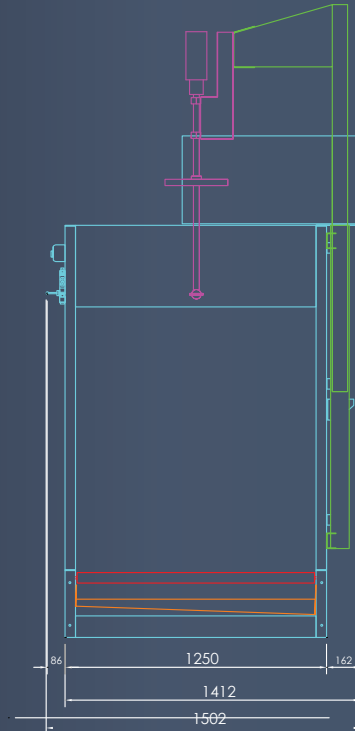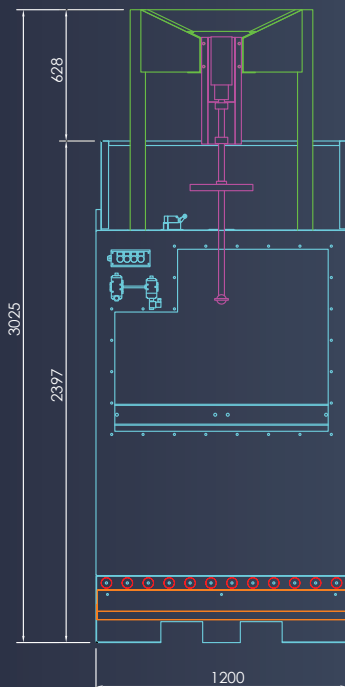

Unit 14
Flanshaw Way
Wakefield
West Yorkshire
United Kingdom
WF2 8UA