



THE RJ-IW MODULES

IBC thermal dryer : RJ-DIBC

The RJ-DIBC thermal drying station comprises of an integrated roller track, housing, and a high-volume heated air blower to thermally dry the interior of the IBCs.

How does it work?

The Rotajet RJ-DIBC is fitted with a high-volume heated air blower which is lowered down pneumatically into the IBC by the operator. As the drying cycle starts, a high-volume blower transfers heated air into the container.

The excess water in the IBC is vaporised resulting in a dry IBC ready for reuse.



Hot air blower

The hot air blower allows control over time, temperature and air flow.





The control panel allows the operator to control the time, temperature and airflow of the thermal dryer.

Features

- 200L Per Min at 130° C
- 5 Min cycle times
- All wetted parts constructed from stainless steel
- Fully modular Systems
- Roller track and housing unit
- Simple Operation




Phrases	1 x
Voltage	230 V
Current	16 A
Power	3680 W
Frequency	50/60 Hz
Air temperature control	Closed loop










ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	200222-04	RJ DRY - SHELL ASSEMBLY	1
2	200222-05	BOOTH GUARD ASSEMBLY	1
3	200223	DRYER AREA ASSEMBLY	1
4	121AB0700AP	METAL WORK - C-CHANNEL SHELLED, 13502 TYPE A 80 SCALE X 700mm 18GAW	1
5	18C3A31	LIGHT SWITCH	1
6	DW 125A WASHER	M10 FORM A FLAT WASHER	23
7	DW 982 NYLOC NUT	M10 HEXAGON NYLON INSERT THICK NUT	23
8	DW 943 SET SCREW	M10 X 25 CAP HEAD HEXAGON SOCKET SCREW	9
9	DW 910 CAP HEAD HEX SOCS SCREW	M10 X 25 CAP HEAD HEXAGON SOCKET SCREW	9
10	200224	WASH BOOTH PNEUMATIC ASSEMBLY	1
11	200222-08	4 - GANG REMOTE PANEL ASSEMBLY	1
12	WASH LINE CABLE TRAC		1

DATE	REV.	DESCRIPTION	DATE	APPROVED
	A	ISSUE 1 & 2 HAVE BEEN REVISED	27.2.20	

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	200222-04	RJ DRY - SHELL ASSEMBLY	1
2	200222-05	BOOTH GUARD ASSEMBLY	1
3	200223	DRYER AREA ASSEMBLY	1
4	121AB0700AP	METAL WORK - C-CHANNEL SHELLED, 13502 TYPE A 80 SCALE X 700mm 18GAW	1
5	18C3A31	LIGHT SWITCH	1
6	DW 125A WASHER	M10 FORM A FLAT WASHER	23
7	DW 982 NYLOC NUT	M10 HEXAGON NYLON INSERT THICK NUT	23
8	DW 943 SET SCREW	M10 X 25 CAP HEAD HEXAGON SOCKET SCREW	9
9	DW 910 CAP HEAD HEX SOCS SCREW	M10 X 25 CAP HEAD HEXAGON SOCKET SCREW	9
10	200224	WASH BOOTH PNEUMATIC ASSEMBLY	1
11	200222-08	4 - GANG REMOTE PANEL ASSEMBLY	1
12	WASH LINE CABLE TRAC		1



DETAIL C
SCALE 1:5

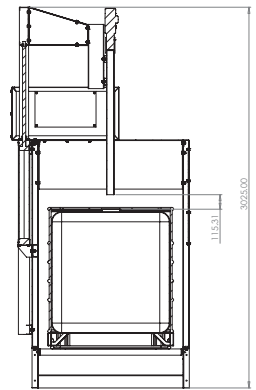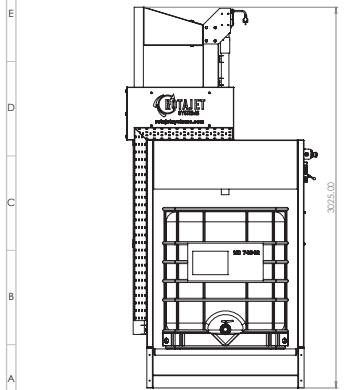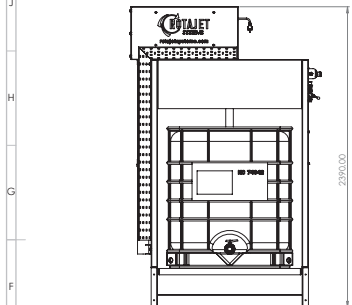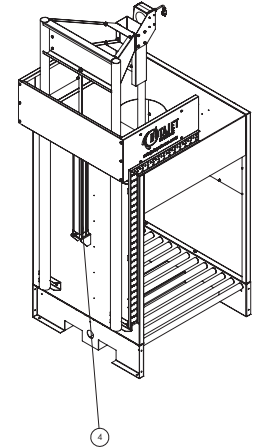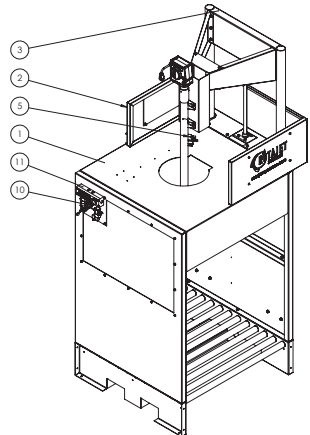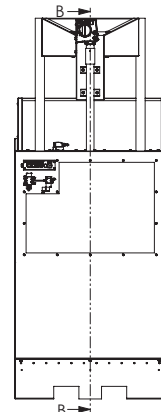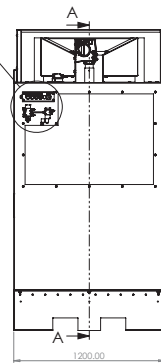

DATE	REV.	DESCRIPTION	DATE	APPROVED
	A	ISSUE 1 & 2 HAVE BEEN REVISED	27.2.20	

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	200222-04	RJ DRY - SHELL ASSEMBLY	1
2	200222-05	BOOTH GUARD ASSEMBLY	1
3	200223	DRYER AREA ASSEMBLY	1
4	121AB0700AP	METAL WORK - C-CHANNEL SHELLED, 13502 TYPE A 80 SCALE X 700mm 18GAW	1
5	18C3A31	LIGHT SWITCH	1
6	DW 125A WASHER	M10 FORM A FLAT WASHER	23
7	DW 982 NYLOC NUT	M10 HEXAGON NYLON INSERT THICK NUT	23
8	DW 943 SET SCREW	M10 X 25 CAP HEAD HEXAGON SOCKET SCREW	9
9	DW 910 CAP HEAD HEX SOCS SCREW	M10 X 25 CAP HEAD HEXAGON SOCKET SCREW	9
10	200224	WASH BOOTH PNEUMATIC ASSEMBLY	1
11	200222-08	4 - GANG REMOTE PANEL ASSEMBLY	1
12	WASH LINE CABLE TRAC		1



Values (kg) / Dimensions (mm)		
Model	Weight	Dimensions
RJ 1000	1000	1000
RJ 1500	1500	1500
RJ 2000	2000	2000
RJ 2500	2500	2500
RJ 3000	3000	3000
RJ 3500	3500	3500
RJ 4000	4000	4000
RJ 4500	4500	4500
RJ 5000	5000	5000

GENERAL INFORMATION		SPECIFICATIONS		CONTACT INFORMATION	
Model		Weight		Address	
Capacity		Dimensions		Phone	
Material		Volume		Fax	
Color		Power		Email	
Accessories		Warranty		Website	
Options		Installation			
Notes					
RJ DIBC DRYER BOOTH					
200222B					